

A280

FEATURES

- AUTOMATIC
- READY TO USE
- HEAVY DUTY CONDITIONS
- STURDY STRUCTURE

The PIUSI A28O is the biggest nozzle among the Piusi range of automatic fuel nozzles with its flow rate up to 28O l/min and spout OD 38,5 mm. Fully automatic thanks to the structural device that stops dispensing when the tank is full; it comes with a built-in swivel to guarantee maximum versatility.

PERFORMANCE

ир то **280 L/MIN**

FLOW-RATE

11/2" BSP

38,5MMOD SPOUT
A280





A280

PACKAGING														
	WEIGHT		PAC	N. BOXES / EUROPALLET										
CODE	KG	LBS	ММ	INCH	PCS/BOX	×	4							
F13249000	3,30	7,28	-	-	1	-	-							


































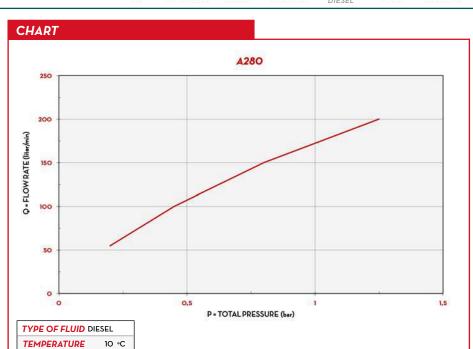

IN THE BOX

- · A280 NOZZLE
- · INSTRUCTION MANUAL

DETAILS





DIMENSIONS 80 Dimensions expressed in millimeters

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

TECHNICAL DATA											
CODE		FLUIDS TYPE	FLOW-RATE		INLET		SPOUT				
WITH SWIVEL	DESCRIPTION		L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM				
F13249000	A28O	D	280	74	-	11/2"	38,5				