



DISPENSERS



PUMPS



METERS



NOZZLES



FILTRATION



FLUID  
MONITORING

# A60 ATEX

## FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Expressly engineered to meet the strictest requirements of the ATEX/IECEX regulations, the PIUSI A60 ATEX is an automatic nozzle suitable to dispense fluids - such as gasoline, kerosene, diesel and others - in potentially explosive atmospheres. It is fitted with a structural component that automatically stops dispensing when the tank is full.

## PERFORMANCE

UP TO

**60 L/MIN**

FLOW-RATE

**1" BSP**

INLET

**Ø20MM**



SPOUT



A60 ATEX



## PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX		
FO0613020	1,25	2,76	460X200X80	181X78X31	1		



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

## CHART

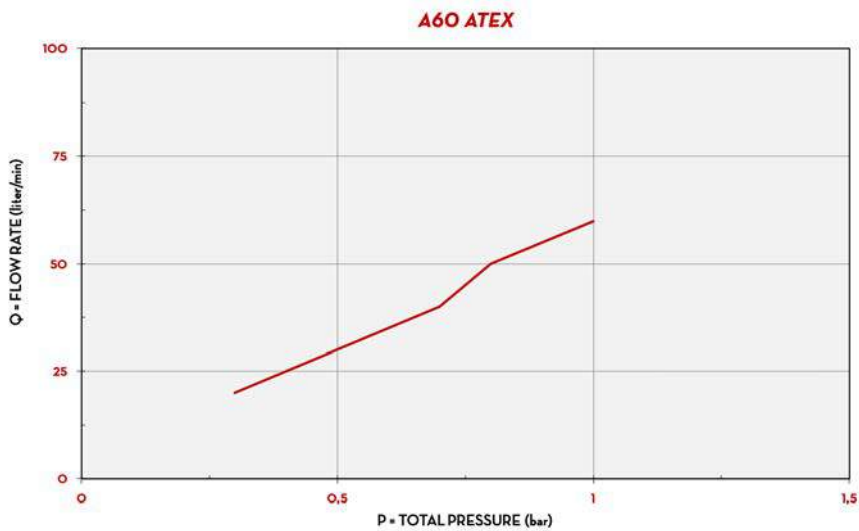

TYPE OF FLUID DIESEL

TEMPERATURE 20 °C


## IN THE BOX

- A60 ATEX NOZZLE
- INSTRUCTION MANUAL

## DETAILS



## DIMENSIONS

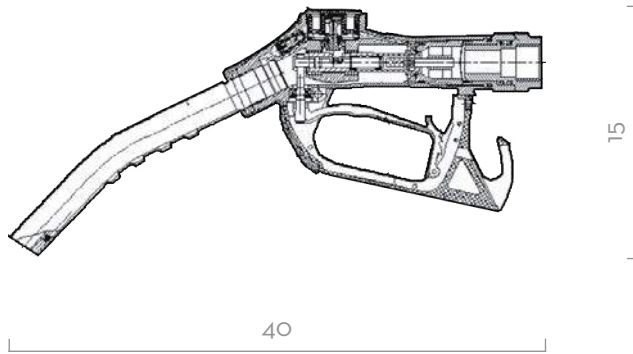

Dimensions expressed in millimeters

## MATERIALS

- BODY: ALUMINIUM
- SEAL: NBR

## TECHNICAL DATA

CODE		DESCRIPTION	FLUIDS TYPE	FLOW-RATE		INLET		SPOUT
WITHOUT SWIVEL	WITH SWIVEL			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
-	FOO613020	A60 ATEX	D G K	60	16	-	F 1"	20

# A60 ATEX