



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION



FLUID
MONITORING

OCIO 2.0

FEATURES

- LOW/HIGH LEVEL ALARMS
- FLUID QUANTITY INDICATION
- FLUID HEIGHT INDICATION
- BUILT-IN DISPLAY
- COMPATIBLE WITH SSM 2.0 AND MCO 2.0

With its brand-new design, OCIO 2.0 by Piusi is the upgraded version of the tank level indicator compatible with SSM 2.0 and MCO 2.0 systems. It requires a LAN/Wi-Fi connection to communicate with the software. It maintains all the performances of the standard OCIO. Thanks to its interchangeable probe, OCIO 2.0 is compatible with several fluids.

PERFORMANCE

UP TO

4MT

HEIGHT

TANK

1%

FULL SCALE

ACCURACY

UP TO

50 MT

LENGTH

PROBE TUBE

UP TO

30 CST

VISCOSITY



OCIO

10 METERS HOSE

BRASS PROBE

PACKAGING

| CODE | WEIGHT | | PACKAGING | | |
|-----------|--------|-----|-------------|---------------|---------|
| | KG | LBS | MM | INCH | PCS/BOX |
| FO0755260 | 2,2 | 4,8 | 300X410X100 | 11,8X16,1X3,9 | 1 |
| FO0755220 | 2,2 | 4,8 | 300X410X100 | 11,8X16,1X3,9 | 1 |
| FO075521A | 2,2 | 4,8 | 300X410X100 | 11,8X16,1X3,9 | 1 |



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIO DIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



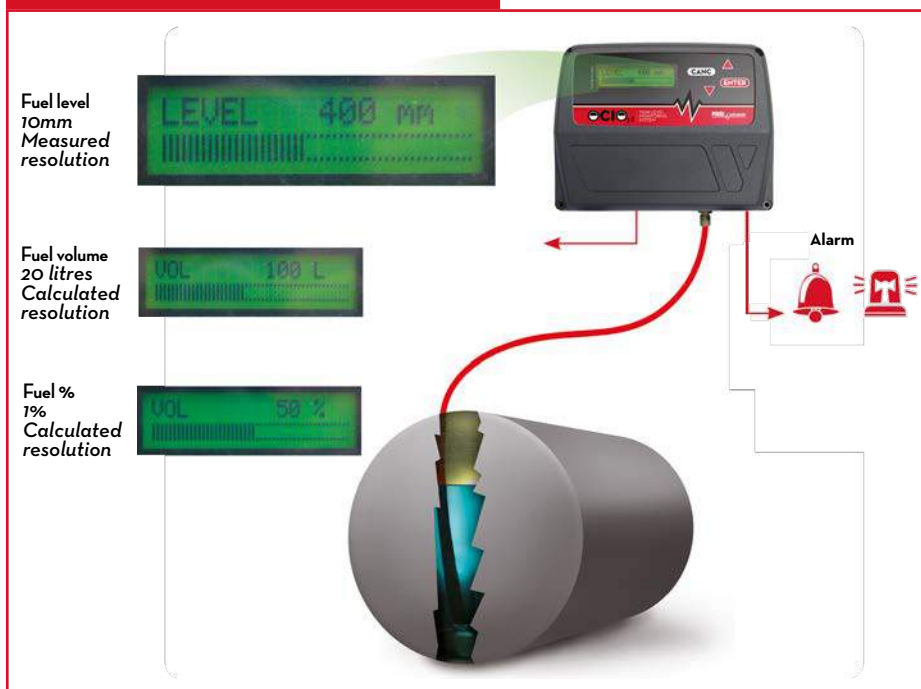
WATER



WINDSCREEN

CONNECTION**IN THE BOX**

- OCIO UNIT
- PROBE
- 10 MT TUBE
- INSTRUCTION MANUAL

DETAILS**FUNCTIONING**

SSM 2.0
SELF SERVICE MANAGEMENT

SSM 2.0 SW (pag. 152)

MATERIALS

- PROBE: BRASS
- TUBE: TECHNOLYMER

TECHNICAL DATA

| CODE | DESCRIPTION | FLUIDS TYPE | VISCOSITY cSt | VOLTAGE | | RS EXIT |
|-----------|--------------------------------|-------------|------------------|-----------|---------------|----------|
| | | | | AC V./HZ | POWER WATT | |
| FO0755260 | LEVEL INDICATOR OCIO MC 2.0 | A B D O W W | UP TO 30 | 230-50/60 | 20 | REQUIRED |
| FO0755220 | LEVEL INDICATOR OCIO RS485 2.0 | A B D O W W | UP TO 30 | 230-50/60 | 20 | REQUIRED |
| FO075521A | LEVEL INDICATOR OCIO WIFI 2.0 | A B D O W W | UP TO 30 | 230-50/60 | 20 | REQUIRED |